


# Datasheet T212

Dual-12 High SPL point source loudspeaker



The T212 is Devil's flagship, high performance, point source offering. With incredible SPL levels in a compact form, it is perfectly suited for both live and club music applications. A sophisticated design process complemented with advanced European transducers ensure exceptional performance in terms of both efficiency and neutrality. Its ultra-low distortion characteristics help deliver maximum impact, while maintaining a smooth and refined tonal character.

## Dimensions

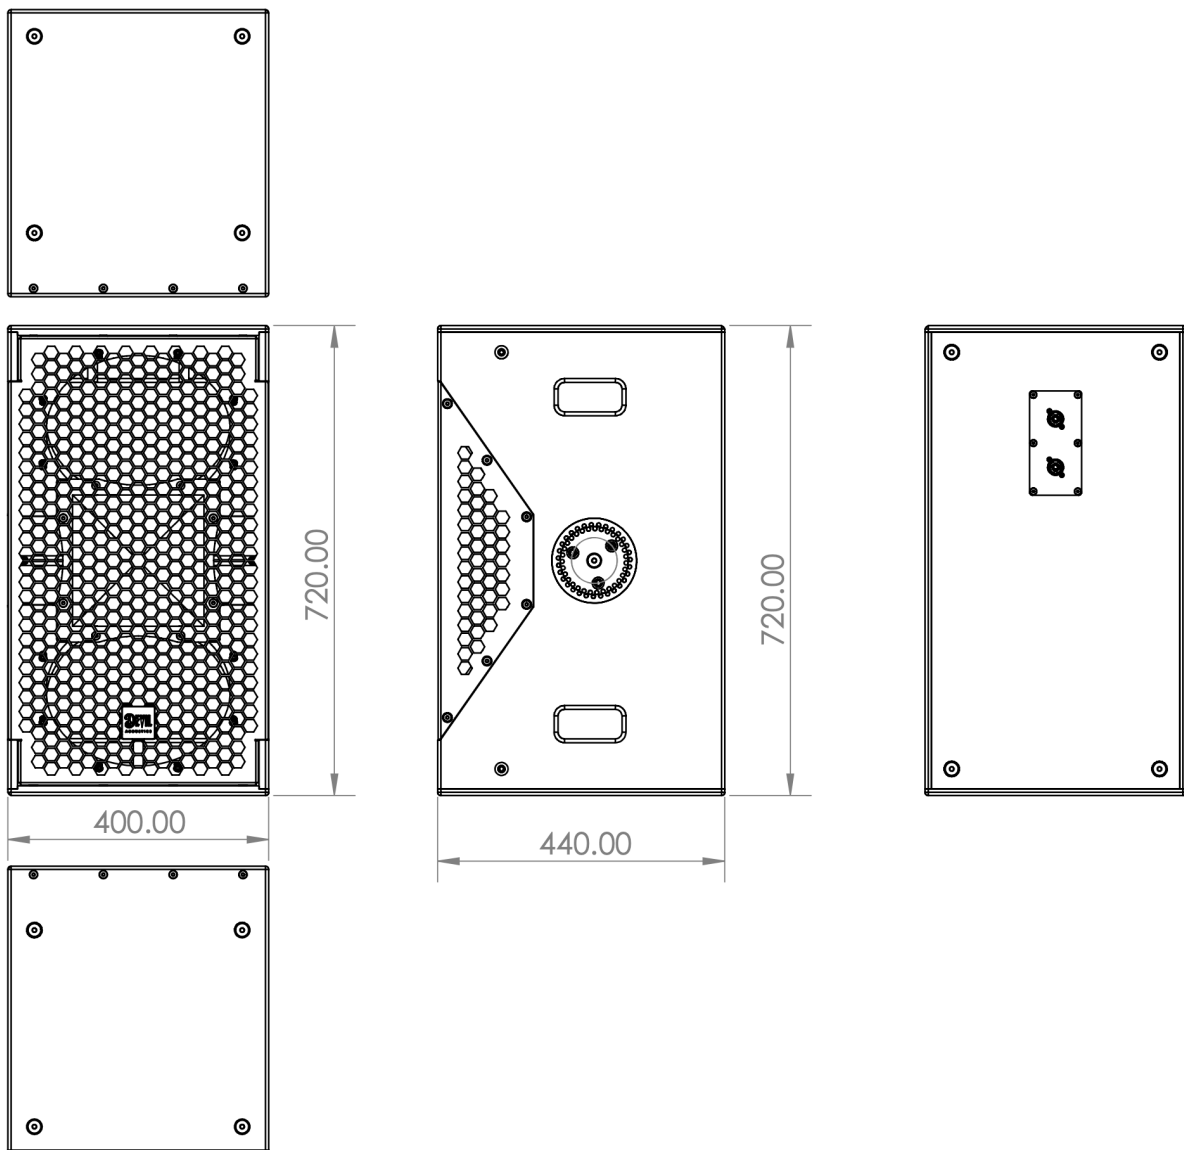

## Specifications

Driver	LF: 2 x 12" [300 mm], 4" [100 mm] voice coil HF: 1.4" [36 mm] exit / 3.4" [86 mm] voice coil, compression driver
Frequency response	75 – 20,000 Hz (- 3dB)
Power capacity LF	2000 W continuous, 8000 W peak
Power capacity HF	130 W continuous, 520 W peak
Impedance	LF: 4 $\Omega$ , HF: 8 $\Omega$
Coverage (h $\times$ v)	90° $\times$ 60°
SPL <sub>max</sub> / 1 m	143 dB

## Contact

Web [www.devil-acoustics.com](http://www.devil-acoustics.com)  
 Email [info@devil-acoustics.com](mailto:info@devil-acoustics.com)  
 Whatsapp +91 99222 65000

### Office Germany

Bits & Bytes Production GmbH  
 Am Storrenacker 1a  
 76139 Karlsruhe  
 Germany

### Office India

Devil Acoustics Pvt. Ltd.  
 D15 Liberty Society, North Main Road  
 411001 Pune  
 India

### Disclaimer

Owing to a policy of continuous product improvement, Devil Acoustics reserves the right to change specifications and appearance of products without notice.